



TERM2000 IP65 Lamp replacement instruction


Tools needed to replace the emitter :
TORX wrench (T30)
hexagon-socket wrench (No. 3)
Flat screwdriver

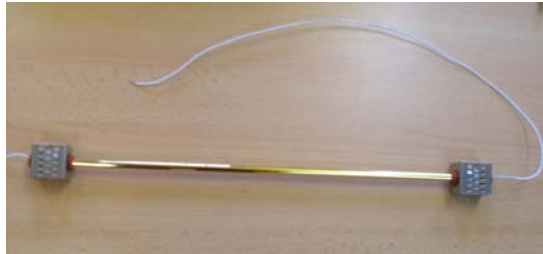


Do not touch quartz emitter with bare hands. If grease have been deposited on quartz, simply clean before lighting with cloth moistened with alcohol.

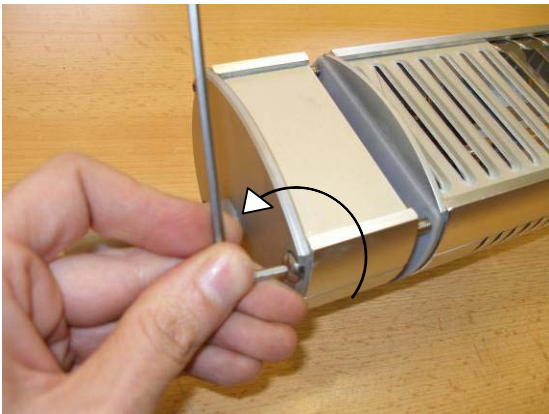

dismountig - step 1

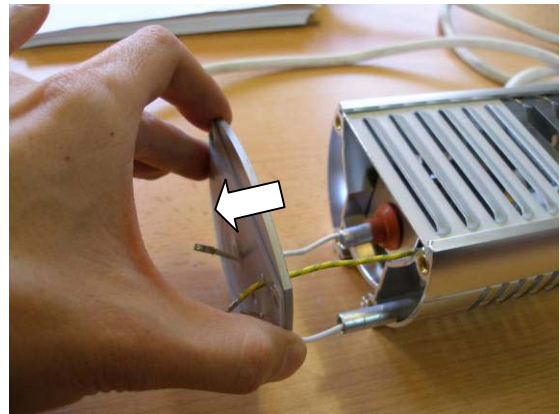


dismountig - step 4

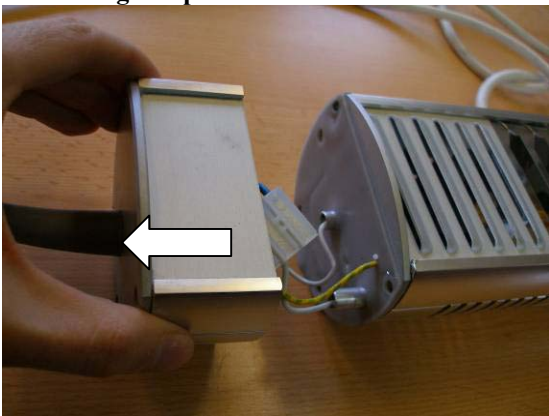


dismountig - step 2




dismountig - step 5

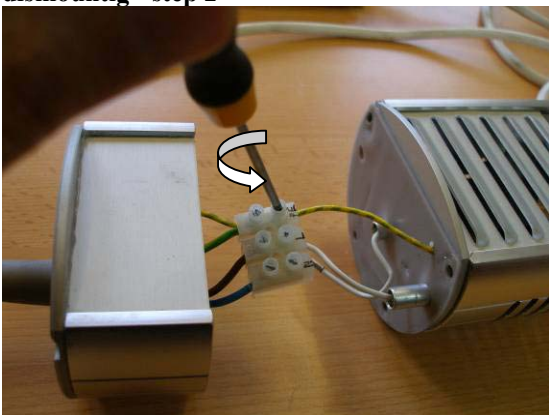


dismountig - step 3

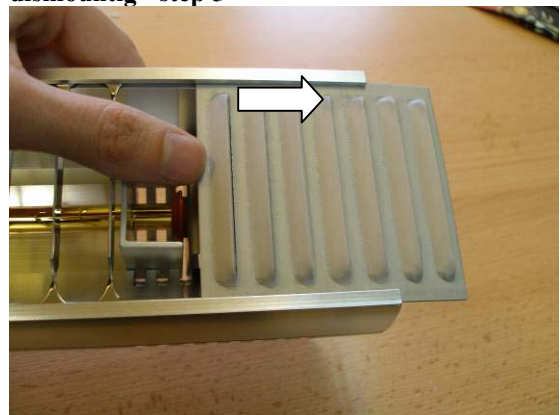


dismountig - step 6

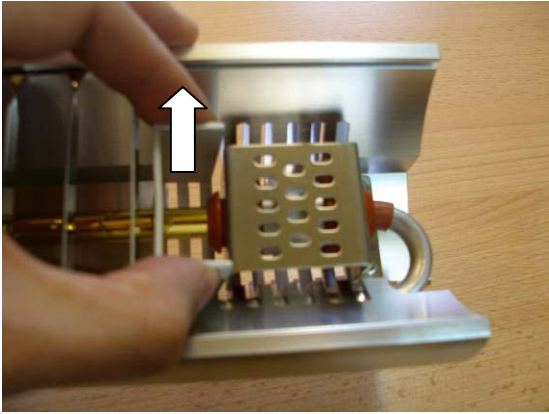


dismountig - step 7

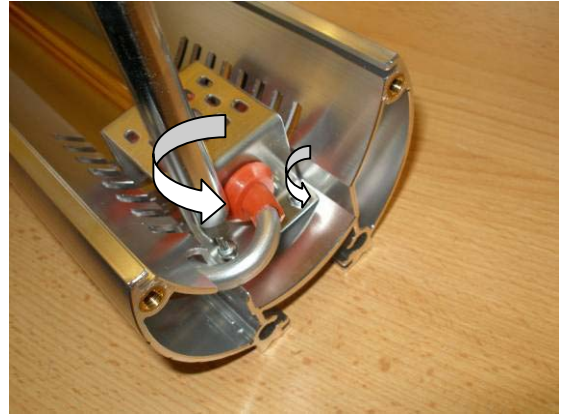


dismountig - step 11

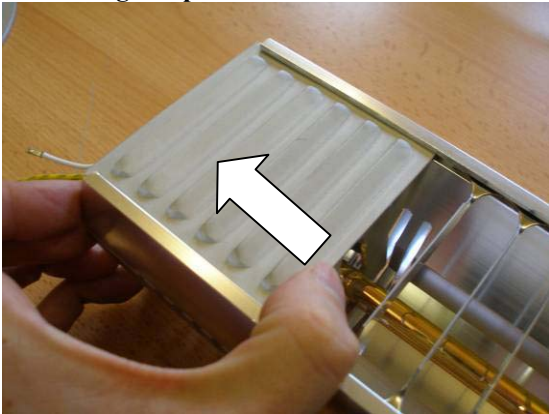


dismountig - step 8

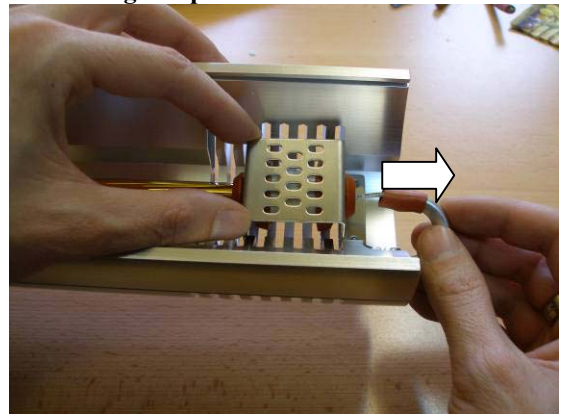


dismountig - step 12

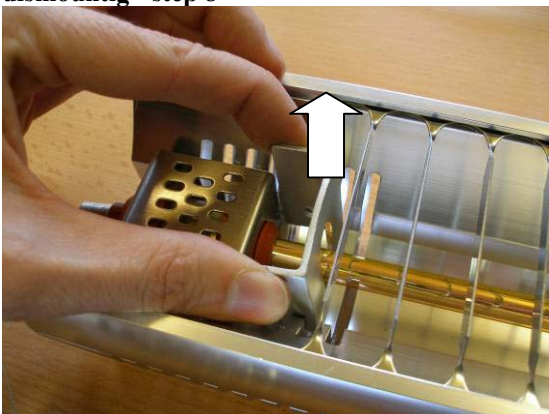


dismountig - step 9

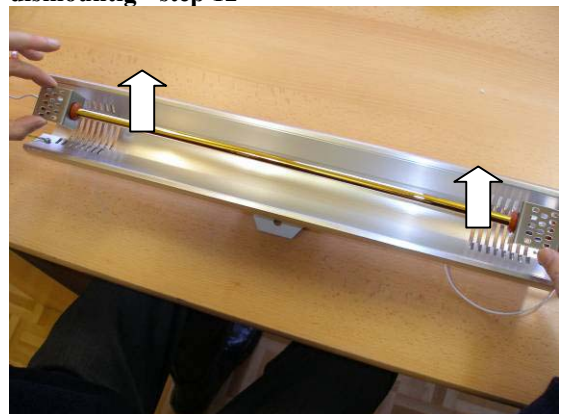


dismountig - step 13

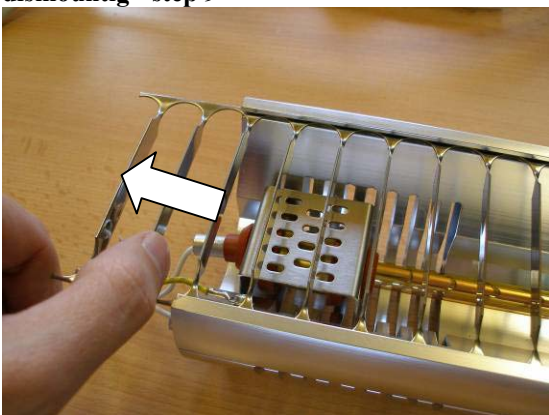


dismountig - step 10

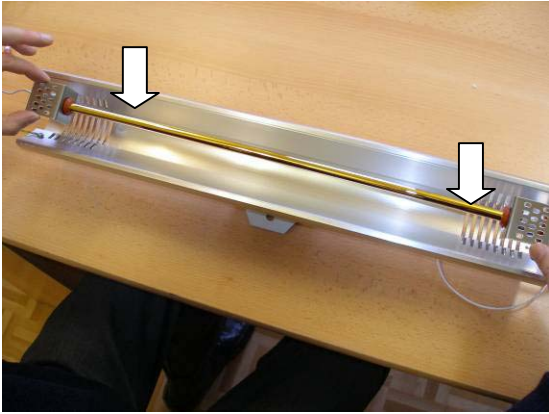


mounting - step 1

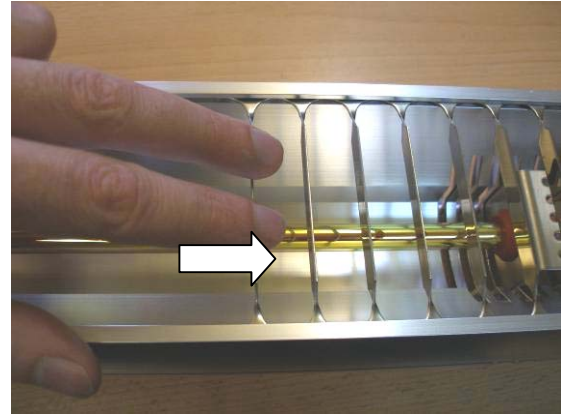


mounting - step 5

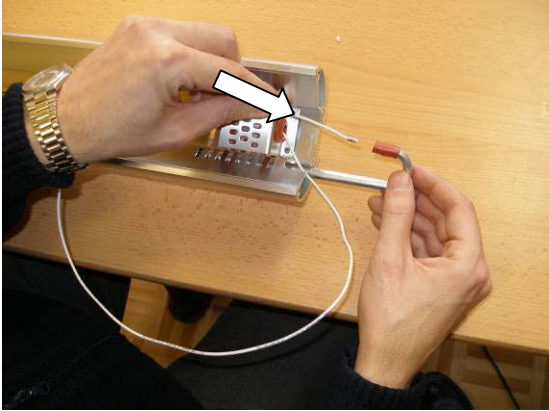


mounting - step 2

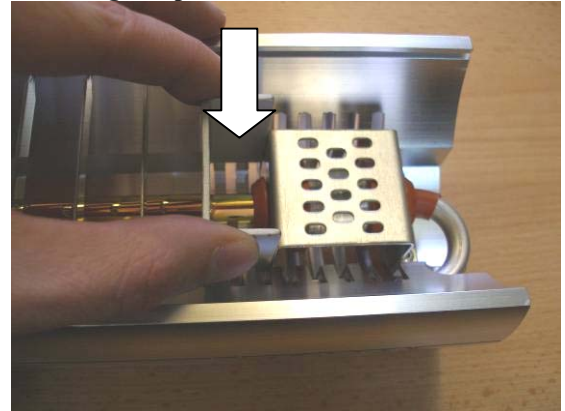


mounting - step 6

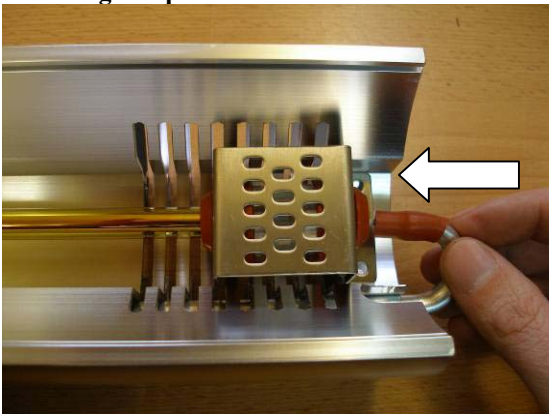


mounting - step 3

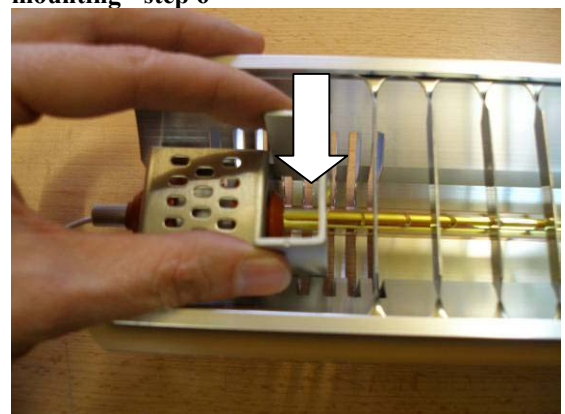


mounting - step 7

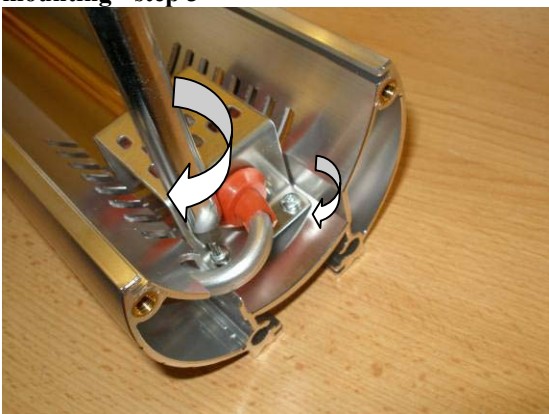



mounting - step 4

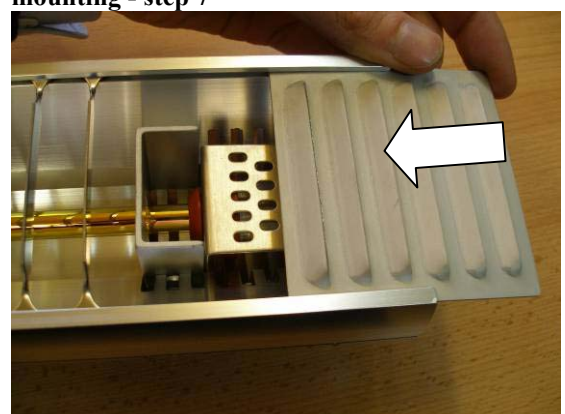



mounting - step 8

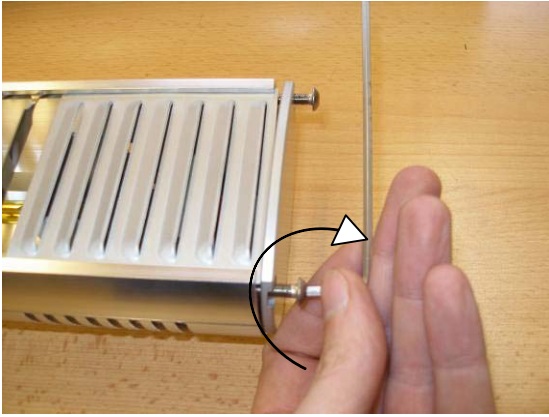


mounting - step 9

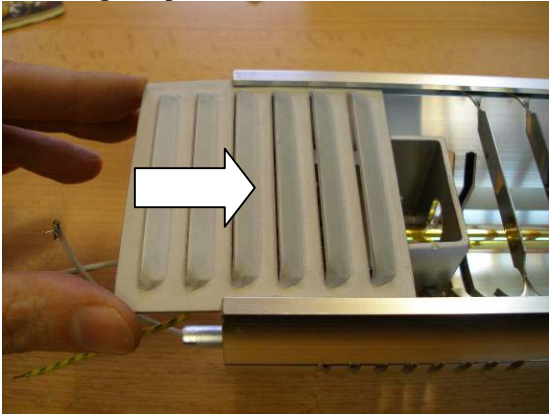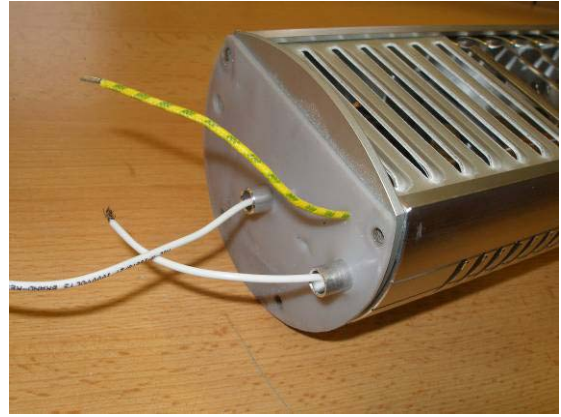


mounting - step 10

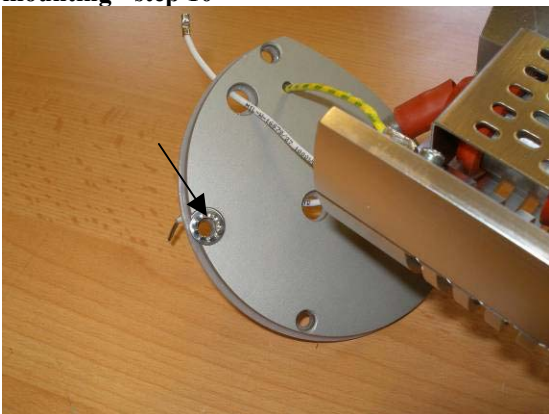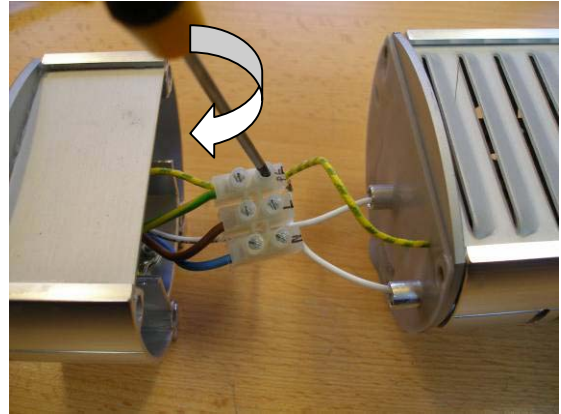

mounting - step 13

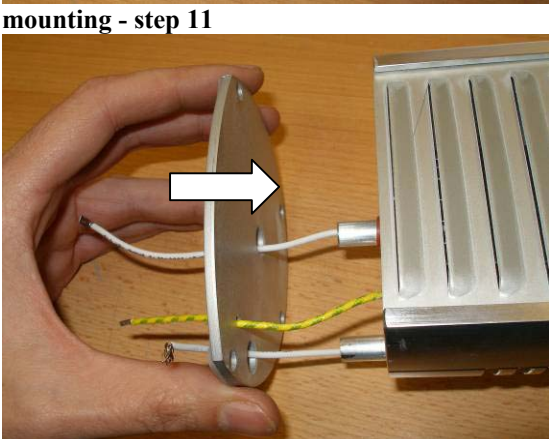

mounting - step 11

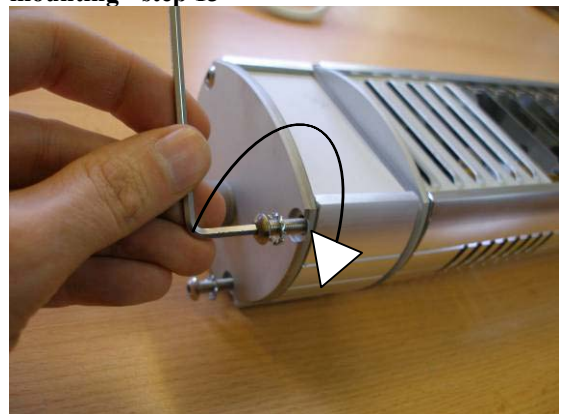

mounting - step 14

